

HDMI2.0 5X1 SWITCH with USB Charge

USER MANUAL



Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

1.0 Introduction

This is a high performance five HDMI input and one HDMI output switcher, with one USB port which can support USB Charge for your phone. The system supports all 3D TV formats in addition to all HDTV formats up to 4Kx2K. Furthermore, the remote control gives users to complete control over the selection of sources and makes the device incredibly user friendly.

2.0 Features

1. 5 ports HDMI input, 1 port HDMI output
2. 1 X USB port output support USB charge.
3. Compliant with HDMI2.0, HDCP2.2 and DVI 1.0;
4. Support 4k2k@30Hz with 24bit RGB/YCbCR 4:4:4/YCbCR 4:2:2;
5. Support up to 4k2k@60Hz with 12bit YCbCR 4:2:0;
6. Supports LPCM 7.1CH, Dolby TrueHD, and DTS-HD Master Audio;
7. Supports smart auto switch function;
8. Supports IR and Panel button control;



3.0 Package

1. Main Device-----1pcs
2. 5V/3A DC Power adapter -----1pcs
3. Remote controller -----1pcs
4. User manual -----1pcs
5. Neutral Packing-----1pcs

4.0 Specifications

| | |
|--------------------------|---|
| In put Ports | 5 x HDMI (Female type) |
| Output Port | 1 x HDMI (Female Type) |
| Output USB x 1 | Support power charge |
| Remote controller Suport | IR and Panel button control |
| Audio support | LPCM 7.1CH, Dolby TrueHD, and DTS-HD Master Audio; |
| Video resolution | Up to 4K x 2K/60Hz |
| 3D Format support | Up to 1080P/60Hz |
| Operating Temperature | 0 °C~40 °C/ 32 °F~104 °F |
| Storage Temperature | 20 °C ~ 60 °C/-4 °F ~140 °F |
| ESD Protection | Human Body model: ±8 kV (air-gap discharge) ±4 kV (contact discharge) |
| Demensions: | 20CM X84 CM X 132 CM |

5.0 Front and Back Panel

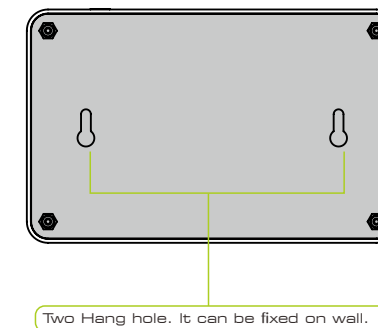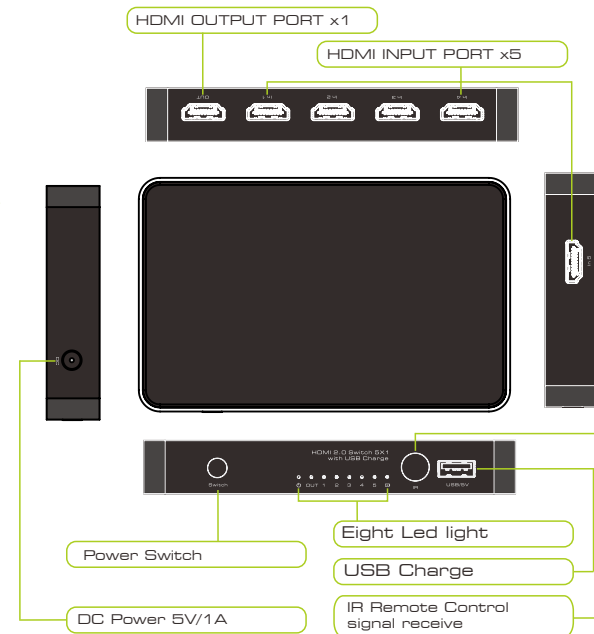

6.0 Connection diagram

