

HDMI to VGA Scaler Converter

LM-HV01

Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

Introduction

The HDMI to VGA scaler converter which can convert mobile or HDMI digital video audio signal to analog VGA signal and the FL / FR stereo audio signal, while support DVI system sideline signals. Help users convert the high quality of digital signal to analog signal. So that can play on CRT/LCD/LED monitor, HDTV or projector.

Features

- 1.No need to install drivers, portable, flexible, plug and play.
- 2.High quality scaling technology for input resolutions .
- 3.Multiple output resolution set in OSD menu.
- 4.Compliant with HDMI1.3,DVI1.0 Standard.
- 5.Share your photos, music and movies with your family and friends on the TV.


Package

- | | |
|--------------------------------|-------|
| 1.HDMI to VGA Converter | 1 pcs |
| 2.5V1A DC Power Supply Adaptor | 1 pcs |
| 3.Operation Manual | 1 pcs |

Specification

| | |
|-------------------------|--|
| Input ports | 1xHDMI |
| Output ports | 1xVGA,1xEarphone |
| Dimensions(mm) | 100(D)x84(W)x28(H) |
| Wight (g) | 300 |
| HDMI input resolution | 480i/60Hz,480p/60Hz,576i/60Hz,576p/60Hz, 720p50/60Hz,1080i50/60Hz,1080p50/60Hz |
| VGA output resolution | 800x600@60Hz,1024x768@60Hz,1360x768@60Hz, 1440x900@60Hz,1280x1024@60Hz,1680x1050@60Hz, 1600x1200@60Hz,1920x1080@60Hz |
| Operating Temperature | 0°C ~ 40°C / 32°F ~ 104°F |
| Storage Temperature | -20°C ~ 60°C / -4°F ~ 140°F |
| Relative Humidity | 20 ~ 90% RH (Non-condensing) |
| Power Consumption (Max) | 3W |
| ESD Protection | Human Body Model: ± 8kV (air-gap discharge) ± 4kV (contact discharge) |

Operation Controls and Functions

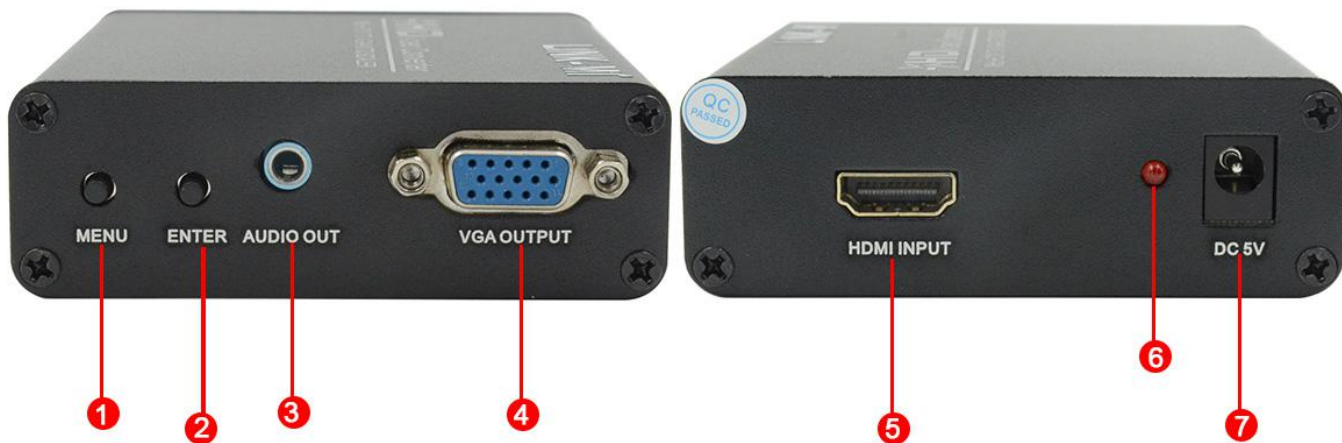

- 1 MENU Button
- 2 ENTER Button
- 3 Audip output
- 4 VGA output

- 5 HDMI input
- 6 Power LED
- 7 DC 5V

Connection and Installation

1. Connect a source such as a Blu-Ray Player, game console, Satellite Receiver, or smart mobile phone to the Converter HDMI input.
 2. Connect a display such as an monitor or Projector to the VGA output on the Converter.
 3. Connect the audio out to the audio amplifier or headphone by earphone cable.
- Power on the device and display.

