



AHD/TVI/CVI/BNC to HDMI/VGA/BNC Converter

LM-AHD04

I. Introduction

The AHD/TVI/CVI/BNC to HDMI/VGA/BNC video converter can convert AHD/TVI/CVI/CVBS video Signal to HDMI/VGA/CVBS output by digital processing.

It allows you to display any AHD/TVI/CVI/BNC camera (720P/1080P) directly on any type display monitor such as HD TV by HDMI, PC Monitor by VGA and even Analog CCTV monitor by CVBS.

II. Features:

1. Converts AHD/TVI/CVI/CVBS signal to HDMI/VGA/ CVBS
2. HDMI Output compatible with HDCP, HDMI1.4
3. HDMI output resolution: 720P@50/60Hz, 1080P@50/60Hz
4. VGA output resolution:
800x600@60Hz, 1024x768@60Hz, 1366x768@60Hz, 1280x720@60Hz, 1920x1080@60Hz
5. Selectable output by physical button on the device
6. Supports both NTSC/PAL Video inputs –Automatic detection


Note: Distance may be affected by the cable quality and length

III. Product interface:

Marking	Description
S1	Button - Switch output channel
S2	Button - Switch resolution
D1	HDMI Indicator
D2	VGA Indicator
D3	AV Indicator
POWER	Power indicator

VI. Installation Process:

1. Connect the AHD/TVI/CVI/ CVBS Source to the AHD/TVI/CVI/ CVBS input using Coax cable.
2. Connect the converter to the HDMI/VGA/ CVBS display.
3. Connect the converter to power source using the supplied power supply
4. Use the S1/S2 button to switch between outputs and resolutions.

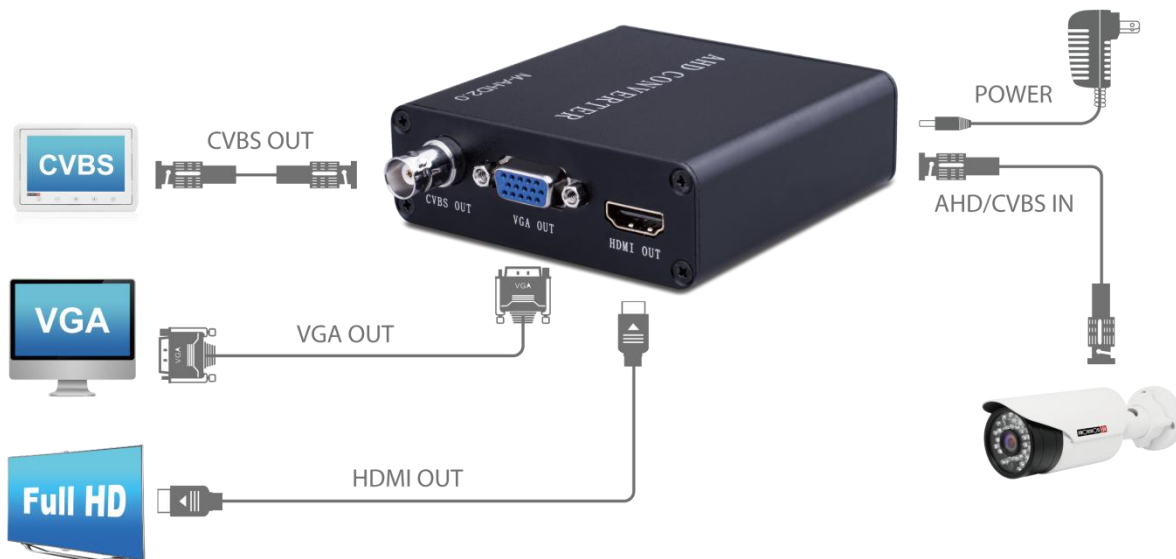

V. Package

1. Converter x1pcs
2. Power 5V x1pcs
3. User Manual x1pcs